

Product Datasheet model uvex super OTG 9169 585

**UVEX ARBEITSSCHUTZ GMBH, Würzburger Str. 181-189,
D-90766 Fürth**

1. Product Characteristics


- classic overspecs for prescription spectacle wearers with a flat lens for a wide field of vision, designed for maximum wearer acceptance
- side arms with soft-grip temple ends provide a comfortable, secure fit without pressure
- nose bridge designed for all-day comfort
- robust polycarbonate lens with uvex's proven supravision coating technology – extremely scratch-resistant lens on both sides
- UV400 – 100 % protection against dangerous UV radiation up to 400 nm
- detectable

2. Technical Details Body**Front piece**

Material	PC+PBT
Colour	black

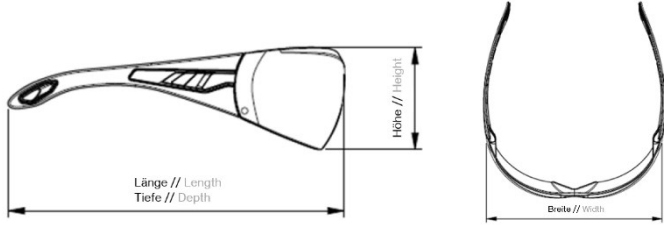
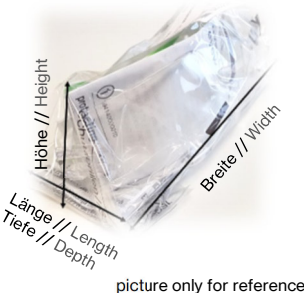
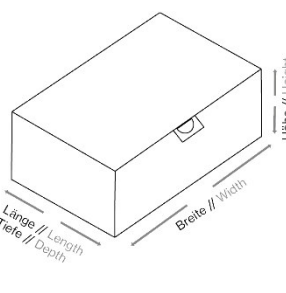
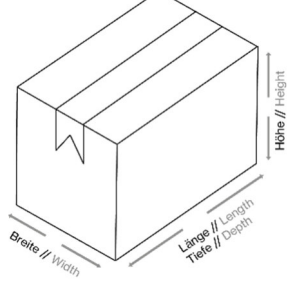
Rivet	
Material	brass, nickel-plated
Temple	
Material	PC+PBT/TPE
Colour	black, clear
Marking	
Manufacturer 's ID code	W
Applicable EN norm	166
Impact resistance	F (45 m/s)
Resistance to high speed particles at extremes of temperature	T
Conformity symbol	CE

3. Technical Details Lens

Material	PC
Thickness	2,1 mm at PD
Coating	uvex supravision sapphire
Colour	clear
UV protection	UV400
Marking according to EN	
Filter	2C-1,2 (EN 170)
Manufacturer 's ID code	W
Optical class	1
Impact resistance	F (45 m/s)
Resistance to high speed particles at extremes of temperature	T
Scratch resistance	K
Conformity symbol	CE
Factory symbol	

4. Logistical Information

Product

Weight	39g		
Dimensions (L x W x B) in approx. mm	 <p style="text-align: right;">picture only for reference</p>		
	161 x 157 x 58		
	Packing unit 1	Packing unit 2	Packing unit 3
EAN Code	4031101512297		
Quantity in pcs.	1	8	160
Dimensions (L x W x H) in approx. mm	 <p style="text-align: center;">picture only for reference</p>		
	76 x 160 x 58	185 x 290 x 97	600 x 400 x 400
Net weight in approx. g	39	312	4,992
Gross weight in approx. g	53	530	9,380
Country of Origin	Germany		

5. Miscellaneous

Standards	EN 166 + EN 170
PPE Category	Category II